

- *Final color selection should be made from actual color chips.*

- See the product selection chart for gauge and finish availability.
- All products are available in smooth or embossed finish.
- Trim is available in all colors.
- Review the sample warranty for complete performance attributes and terms and conditions.

SIGNATURE® 200

STANDARD COLORS
26- AND 24-GAUGE MATERIAL

Siliconized Polyester

Polar White is a Straight Polyester.

* Also available in 29-gauge

** Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.



HAWAIIAN BLUE** ★
SR .31 SRI 31



CRIMSON RED** ★
SR .32 SRI 33



FERN GREEN** ★
SR .29 SRI 29



BURNISHED SLATE** ★
SR .34 SRI 36



ASH GRAY ★
SR .45 SRI 50



SADDLE TAN ★
SR .47 SRI 53



DESERT SAND ★
SR .42 SRI 47



KOKO BROWN ★
SR .35 SRI 37



CHARCOAL GRAY** ★
SR .38 SRI 41




COBALT BLUE** ★
SR .26 SRI 24



RUSTIC RED ★
SR .37 SRI 39



LIGHT STONE ★
SR .56 SRI 66



POLAR WHITE* ★
SR .58 SRI 68

SIGNATURE® 300

STANDARD COLORS
26-GAUGE MATERIAL
PBR, PBU, AVP, PBC, PBD
PANELS ONLY


* Also available in 24-gauge

** Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.

† Minimum quantities and/or extended lead times required for all gauges. Please inquire.



MEDIUM BRONZE* ★
SR .33 SRI 34



SNOW WHITE* ★
SR .65 SRI 78



SLATE GRAY** ★
SR .37 SRI 39



ALMOND* ★
SR .63 SRI 75



CLASSIC GREEN** ★
SR .27 SRI 26




BROWNSTONE* ★
SR .47 SRI 53



BRITE RED† ★
SR .49 SRI 55




HARBOR BLUE** ★
SR .28 SRI 27



BONE WHITE** ★
SR .70 SRI 85

The AVP panel can be used for wall application and features pencil ribs, providing improved aesthetics to the building design.

The AVP panel allows for more insulation to be added behind the panel, providing greater insulating values that meet the energy codes and R-Value requirements.

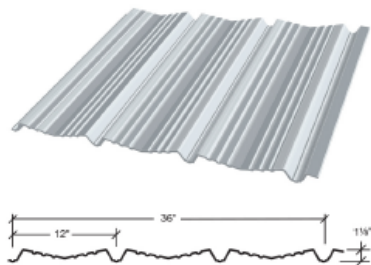

Product Specifications

Applications: Wall

Coverage Widths: 36"

Rib Spacing: 12" on center

Rib Height: 1 1/8"

Panel Attachment: Exposed Fastening System

Gauges: 26 (standard); 22, 24 and 29 (optional)

Finishes: Smooth (standard); Embossed (optional)

Coatings: Galvalume Plus®, Signature® 200, Signature® 300

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
STRUCTURAL	Negative Wind Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Positive Wind Load	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
WALL LISTINGS	Wall Performance - Texas Department of Insurance	ASTM E 1592	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio and Willacy.	See EC-95
	Wall Performance - Florida Approval	ASTM E1592	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	FL# 42378.3

